


# STANDARD RIG NUMBER & LETTER SIZES AND POSITIONING




## UPRIGHT NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

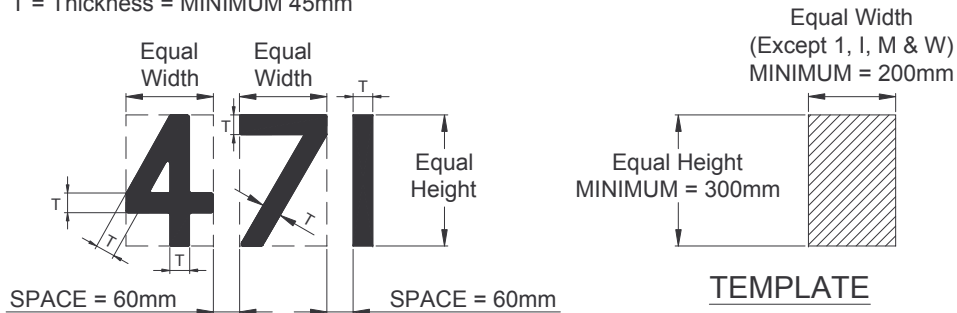

## ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

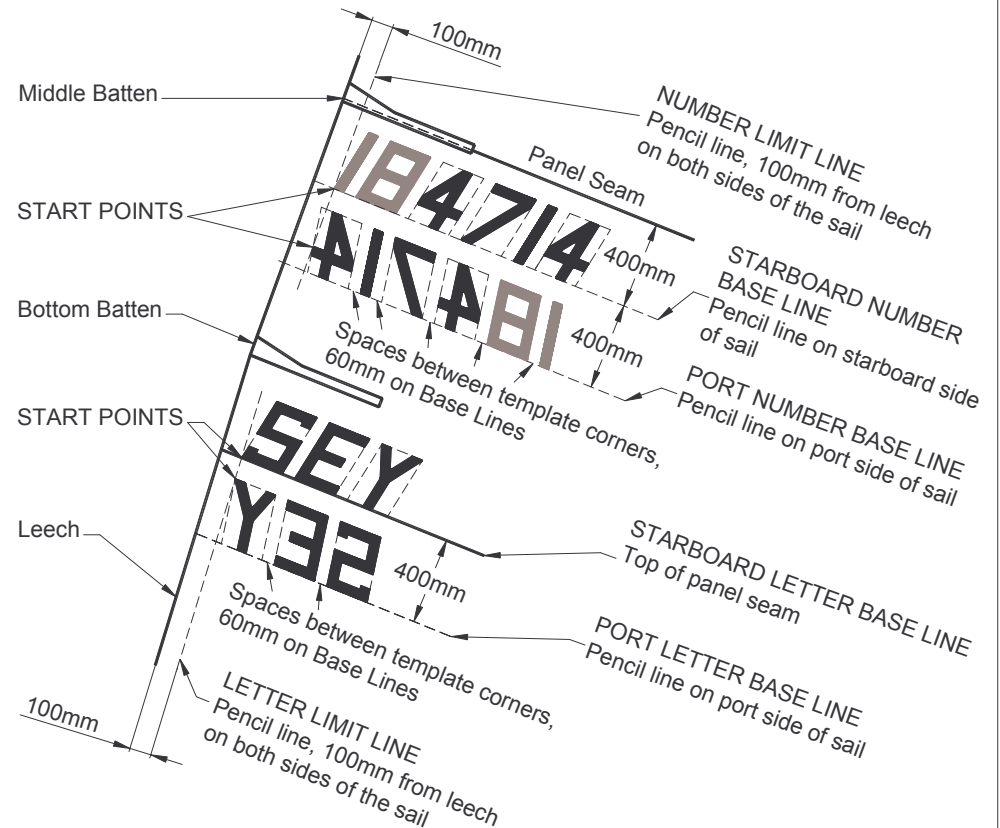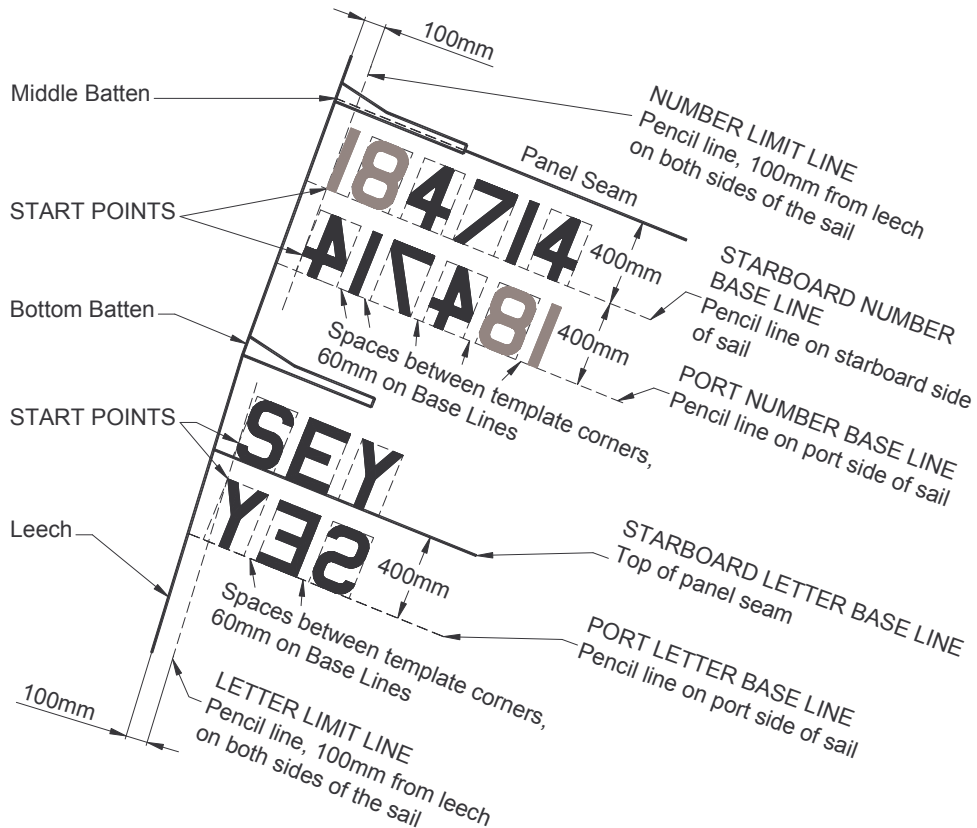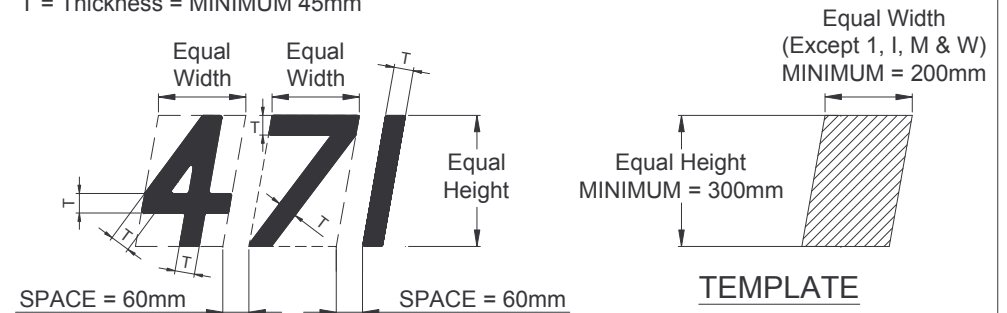

MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.